


MICHELIN AGILIS HD

ALL POSITION 16" LIGHT TRUCK TYRE FOR DEMANDING USAGES



- Minimized operating costs thanks to fewer premature tyre damages
- Peace of mind under challenging conditions with improved casing robustness
- Traction on rough surfaces with aggressive tread pattern design

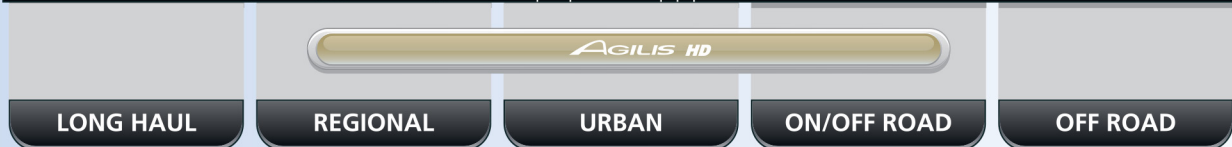

MICHELIN AGILIS HD

ALL POSITION 16" LIGHT TRUCK TYRE FOR DEMANDING USAGES



AGILIS



Minimized operating costs due to increased casing durability

- **30%** bigger cables for summit protection belts, bead and casing ply.




Peace of mind under challenging conditions with improved casing robustness

- **2 Kgs** of additional metallic reinforcement added compared to non HD casing.*



Traction on rough surfaces with aggressive tread pattern design

- Tread compound resistant to cut and chip damages from aggressive road surfaces.
- **10.5 mm** wide zigzag grooves and high tread groove ratio at **21.6%**.



Groove width at 10.5 mm

*Based on internal results.

Note : All illustrations are for reference only and are not true to scale or represent the actual product components.

Rim Diameter	Load per axle		Road pressure		Load index Speed symbol	Dimensional characteristics					Advised rims	Flaps	Tubes or seal
	Single Kg	Twin Kg	Bar	PSI		Dimensions E.T.R.T.O			MICHELIN dimensions				
						S mm	D mm	CdR/RC mm	R' mm	E mm			
16	7.50 R 16 LT AGILIS HD TL												
	2 030	3 930	4.50	65	122/121L (PR14)	216	814	2460	377	238	6.00 5.50F SDC 6.00G SDC 6.50H SDC 5.50F 6L 6 1/2L	16X6.00 16X6.00+	16J
	2 230	4 300	5.00	75									(8)
	2 420	4 680	5.50	80									
	2 610	5 050	6.00	85									
	2 810	5 430	6.50	95									
3 000	5 800	7.00	100										
16	8.25 R 16 LT AGILIS HD TT												
	2 760	5 210	5.00	75	128/126K	237	874	2623	399	262	6.00G SDC 6.50H SDC 6.00 6.50	16X6.00 16X6.00+	16J
	3 000	5 670	5.50	80									
	3 240	6 120	6.00	85									
	3 480	6 570	6.50	95									
	3 600	6 800	6.75	100									